


JOB NAME: _____

DATE: _____

TYPE: _____



DIMENSIONS:

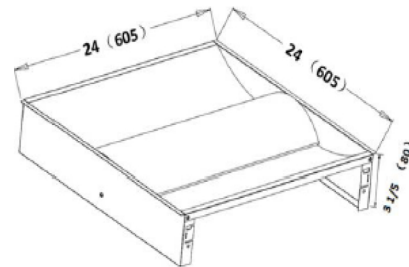

24" L x 24" W x 3.1/8" D

LTR-2x2-40W-40K-D

LTR-2x2-40W-50K-D

LED Troffers 2x2

Ideal one-for-one replacement of conventional lighting systems such as HID and fluorescent. Applications include offices, Libraries and other indoor spaces. Luminaire shall be recessed mounted in a ceiling.

MODEL NO.	WATT	LUMENS	COLOR TEMP
LTR-2x2-40W-40K-D	40W	4400lm	NW 4000K
LTR-2x2-40W-50K-D	40W	4400lm	DL 5000K

LTR-SRFC-2X2	Surface mounting kit (ceiling/wall) for
--------------	---

SPECIFICATIONS:

- Wattage: 40W
- Light output: 4400lm
- Efficacy: 110lm/w
- CRI: >80
- Power factor: 0.97
- Rated input: AC 100-277V 50/60Hz
- Ambient Temperature: - 20°F ~ + 105°F
- IP rating: IP20 (Indoor)

ELECTRICAL (OPTION):

- Dimming
- Emergency fitting

WARRANTY: . Five-year warranty

FEATURES:

Effective advanced LED integration in a traditional low-profile lightweight recessed troffer luminaire shape; specialized low profile single drop basket diffuser cover provides smooth even light; long 50,000 hour life; wide voltage range and constant-current design with high power factor; dimmable with 0-10V signal; mercury-free and no noise.

CERTIFICATIONS:

- UL listed, DLC listed RoHS compliant and fully recyclable

