


JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_



**DIMENSIONS:**

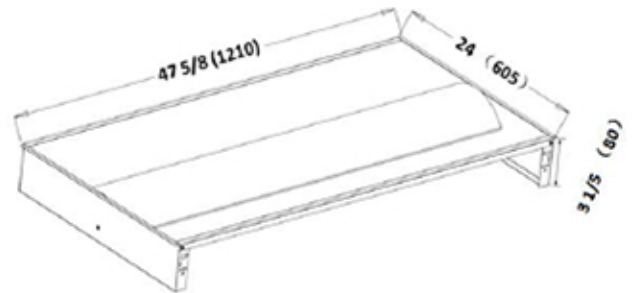

47 5/8" L x 24" W x 3.1/5" D

**LTR-2x4-50W-40K-D**  
**LTR-2x4-50W-50K-D**

**LED Troffers 2x4**

Ideal one-for-one replacement of conventional lighting systems such as HID and fluorescent. Applications include offices, Libraries and other indoor spaces. Luminaire shall be recessed mounted in a ceiling.

**SPECIFICATIONS:**

- Wattage: 50W
- Light output: 5500lm
- Efficacy: 110lm/w
- CRI: >80
- Power factor: 0.97
- Rated input: AC 100-277V 50/60Hz
- Ambient temperature: - 20°F ~ + 105°F
- IP rating: IP20 (Indoor)

**ELECTRICAL (OPTION):**

- Dimming
- Emergency fitting

**WARRANTY:** . Five-year warranty

MODEL NO.	WATT	LUMENS	COLOR TEMP
LTR-2x4-50W-40K-D	50W	5500lm	NW 4000K
LTR-2x4-50W-50K-D	50W	5500lm	DL 5000K

LTR-SRFC-2X4	Surface mounting kit (ceiling/wall) for 24" x 48" x 4-3/4" panel, powder-coated steel
--------------	---

**FEATURES:**

Effective advanced LED integration in a traditional low-profile lightweight recessed troffer luminaire shape; specialized low profile single drop basket diffuser cover provides smooth even light; long 50,000 hour life; wide voltage range and constant-current design with high power factor; dimmable with 0-10V signal; mercury-free and no noise.

**CERTIFICATIONS:**

- UL listed, DLC listed RoHS compliant and fully recyclable

