


**DIMENSIONS:**

5"/6"(D)

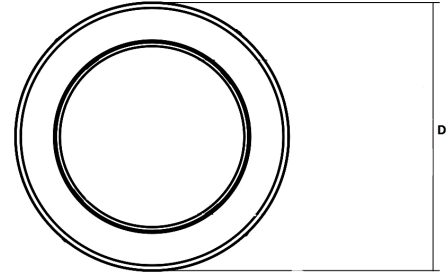

- DLS6-27K      DLS6-30K
- DLS6-41K      DLS6-50K
- DLS6-30K-BR    DLS6-30K-BN

**LED DISK LIGHTS 5"/6" ROUND**

Ideal for New as well as old residential and commercial constructions.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 120VAC
- Wattage: 15w
- Power factor: >0.90
- Efficacy: 63~66LM/W

**HOUSING SPECIFICATIONS:**

- Construction: Spun aluminum
- Gasket: closed cell Neoprene foam gasket
- Fits on 4" Octagonal (40) or 3" Octagonal (30) electrical boxes
- Maximum Ambient temperature: 104°F
- Suitable for damp location

**CERTIFICATIONS: ETL**



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP	FINISH
DLS6-27K	15w	120VAC	950~1000LM	2700K	WHITE
DLS6-30K	15w	120VAC	950~1000LM	3000K	WHITE
DLS6-41K	15w	120VAC	950~1000LM	4000K	WHITE
DLS6-50K	15w	120VAC	950~1000LM	5000K	WHITE
DLS6-30K-BR	15w	120VAC	950~1000LM	3000K	BRONZE
DLS6-30K-BN	15w	120VAC	950~1000LM	3000K	BRUSHED NICKEL

**LIGHTING SPECIFICATIONS:**

- Dimming: Dimmable down to 10% using a standard TRIAC LED dimmer
- LED: Unique DOB (Driver On Board) LED board enclosed in clear plastic casing for better damp location performance
- Lens: White translucent acrylic
- Total lumens: 950~1000LM
- Color temperature: 2700K/3000K/4100K/5000K
- Color rendering index: 90

**WARRANTY: 5 years**

