


FML-R6-MCT

Customer Name: _____

Project Name: _____

Note: _____ | Type: _____

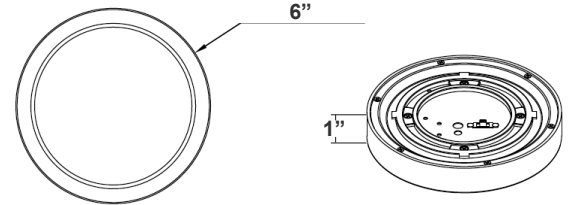

6" x 1"

Flush Mount lighting can use in most rooms of the house, especially those where you want ambient, general light. It's especially useful for hallways, kitchens, family rooms, bathrooms, closets, and bedrooms. Also Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications.

Features

- Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Wet Location Performance
- Multi CCT (Selectable Switch on LED Board Under the Lens)
- Die-cast Aluminum. Powder-Coated
- 5-Year Warranty
- 1" Deep

Technical Specifications

Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 11W
- Efficacy: 60 LPW

Mechanical:

- White Finish
- Die-cast Aluminum. Powder-Coated
- Maximum Ambient Temperature: 104°F
- Rated life: 50,000 hrs

Lighting:

- Lens: White translucent acrylic lens
- LED: Edge Lit LED Technology
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 660LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Multi CCT (Selectable Switch on LED Board Under the Lens)
- Color Rendering Index: CRI ≥ 90

Applications:



- Flush Mount lighting can use in most rooms of the house, especially those where you want ambient, general light. It's especially useful for hallways, kitchens, family rooms, bathrooms, closets, and bedrooms. Also Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

Other Models:


• 14W | 840LM | FML-R8-MCT • 17W | 1020LM | FML-R10-MCT • 26W | 1560LM | FML-R14-MCT • 30W | 2100LM | FML-R18-MCT • 45W | 2700LM | FML-R22-MCT



Photometrics: FML-R6-MCT



BUG Rating: B0-U1-G0

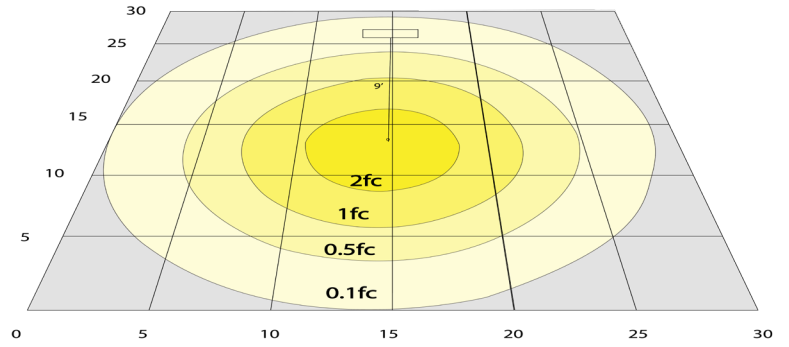


Simulation Based on 4000K Area 30' x 30' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: FML-R6-MCT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FML-R6-MCT	11W	120V	660LM	3000K/ 4000K/ 5000K	B0-U1-G0	60

Sample Ordering

Model	Size	Color Temp.
FML	R6	MCT

Accessory:

Blank = No Option For Accessories

FML-R6-TRM-BK = 6" ROUND TRIM FOR FML-R6 SERIES, BLACK FINISH
 FML-R6-TRM-BN = 6" ROUND TRIM FOR FML-R6 SERIES, BRUSHED NICKEL FINISH
 FML-R6-TRM-BR = 6" ROUND TRIM FOR FML-R6 SERIES, BRONZE FINISH
 FML-RK-712 = 7in/12in ROD KIT FOR FML SEMI-FLUSH INSTALLATIONS
 BOTH LENGTHS PROVIDED IN THE KIT TO CHOOSE

Example:

1. FML-R6-MCT (FOR FML R6 MCT FIXTURE 120-277V)
2. FML-R6-MCT (FOR FML R6 MCT FIXTURE 120-277V)
 FML-R6-TRM-BK (6" ROUND TRIM FOR FML-R6 SERIES, BLACK FINISH)
3. FML-R6-MCT (FOR FML R6 MCT FIXTURE 120-277V)
 FML-R6-TRM-BK (6" ROUND TRIM FOR FML-R6 SERIES, BLACK FINISH)
 FML-RK-712 (7in/12in ROD KIT FOR FML SEMI-FLUSH INSTALLATIONS
 BOTH LENGTHS PROVIDED IN THE KIT TO CHOOSE)

ACCESSORIES:

Optional Round Trims Fit Over the Fixture



FML-R10-TRM-BK
BLACK FINISH



FML-R10-TRM-BN
BRUSHED NICKEL FINISH



FML-R10-TRM-BR
BRONZE FINISH



FML-RK-712

7in/12in ROD KIT FOR FML SEMI-FLUSH INSTALLATIONS
 BOTH LENGTHS PROVIDED IN THE KIT TO CHOOSE

