

RSL SERIES

RESIDENTIAL LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

RSLC6-BF-30K
RSLC6-BF-40K
RSLC6-BF-50K

Customer Name: _____

Project Name: _____

Note: _____


Type: _____



Selection:



This is a 6" LED Commercial Slim Recessed Regressed Baffle Lights which are Ideal for New as Well as Old Residential and Commercial Constructions.

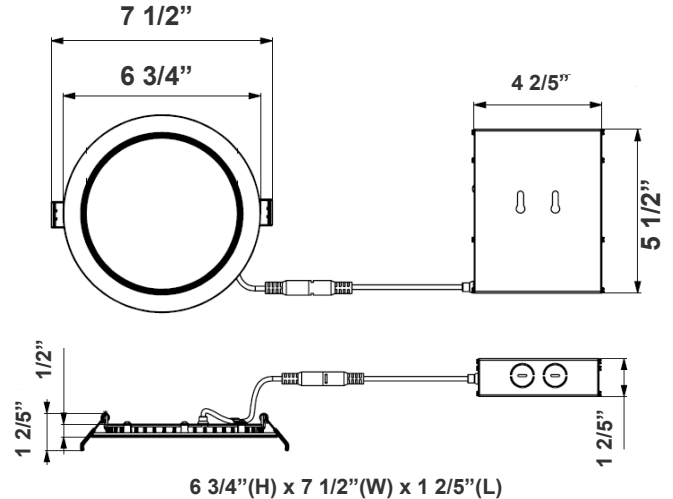

Features

- Optics: White Translucent Acrylic
- Die-Cast Aluminum With Powder Coat Finish
- Junction Box Included With Fixture
- 7-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277V
- Wattage: 12W
- Power Factor: >0.9
- Efficacy: 79 LPW

Mechanical:

- Die-Cast Aluminum With White Powder Coat Finish
- Junction Box Included With Fixture
- Junction Box thickness: 1-3/8"
- Cut-out Hole Diameter: 6-1/4"
- 24" DC cord from driver box to fixture
- Operating Temperature: -4°F to 104°F
- Recessed Mounting
- 5-Year Warranty
- Suitable for Wet location

Lighting:

- Dimming: 0-10V Dimmable
- Optics: White Translucent Acrylic
- Total Lumens: 900LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 90
- Rated life: 50,000 Hrs
- Beam Angle: 110°

Applications:

- New as well as Old Residential
- Commercial Constructions

Other Models:

- 24W | 1900LM | RSLC8-BF-30K
- 24W | 1900LM | RSLC8-BF-40K
- 24W | 1900LM | RSLC8-BF-50K





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co




WG-Z9-Z9-Z2

Photometrics: RSLC6-BF

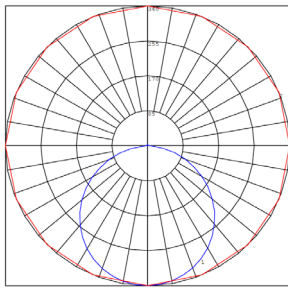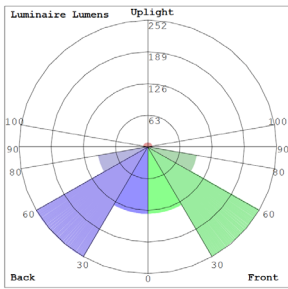

BUG Rating: B1-U1-G0

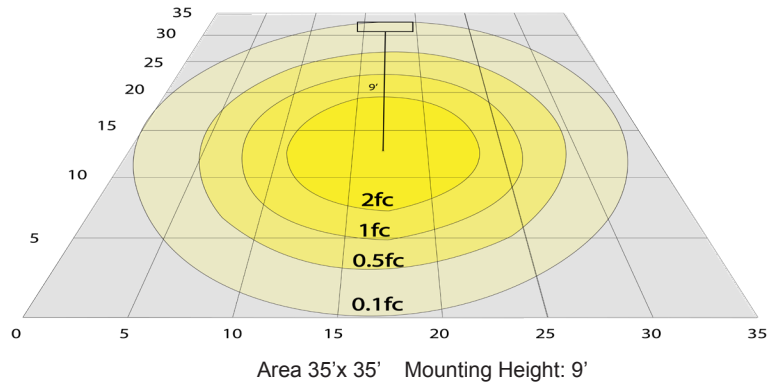


Area 35'x 35' Mounting Height: 9'

Other Views:



Side View

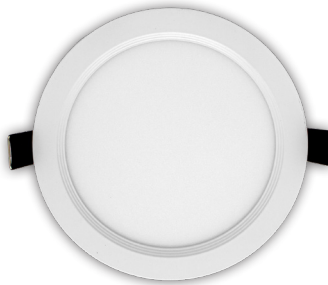

Front View



Back View

Performance Table: RSLC6-BF

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
RSLC6-BF-30K	12W	120~277V	900LM	3000K	B1-U1-G0	75
RSLC6-BF-40K	12W	120~277V	900LM	4000K	B1-U1-G0	75
RSLC6-BF-50K	12W	120~277V	900LM	5000K	B1-U1-G0	75


Sample Ordering

Model	Wattage	Baffle	Color Temp.
RSLC6	12W	BF	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K


Accessories:

Blank = No Option For Accessories
 RSL6-RI = 6" Round Rough-in Plate, 26" Long
 RSL6-RI-13 = 6" Round Rough-in Plate, 13" Long
 RSL-BF-EXT-6IN = RSL-BF 6in DC extension cord
 RSL-BF-EXT-10IN = RSL-BF 10in DC extension cord
 RSL-BF-EXT-20IN = RSL-BF 20in DC extension cord
 RSL-346-RIBH = 3", 4", 6" (Adjustable) Galvanized plate with Bar Hangers
 RSL6-GR = Goof Ring For 6in Lights with Butterfly Wings

ACCESSORIES:

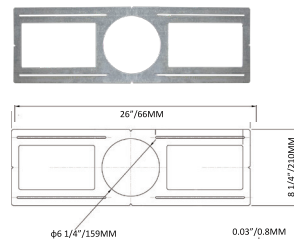


RSL6-RI
26" x 8 1/4"

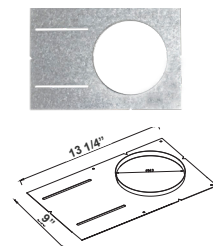


RSL6-RI-13
13 1/4" x 9"



RSL-BF-EXT-6IN
RSL-BF-EXT-10IN
RSL-BF-EXT-20IN



RSL6-GR
7 1/4"



RSL-346-RIBH

Example:

- RSLC6-12W-BF-30K
- RSLC6-12W-BF-30K
RSL-BF-EXT-6IN

(FOR RSLC6 12W 3000K FIXTURE 120-277V)

(FOR RSLC6 12W 3000K FIXTURE 120-277V)
 (RSL-BF 6in DC EXTENSION CORD)

