






SCLP-4FT-40W-35K-D
SCLP-4FT-40W-40K-D
SCLP-4FT-40W-50K-D
SCLP-4FT-TL
SCLP-CB



DIMENSIONS:

2.5"(H) x 9.3"(W) x 47.3"(L)

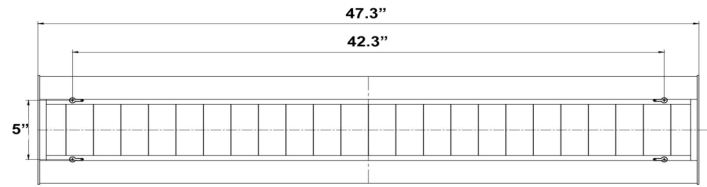

SCLP-4FT-TL(Not Included)

LED PARABOLIC SUSPENDED LIGHT,120-277V

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 40W
- Power factor: >0.95
- Efficacy: 115LM/W

HOUSING SPECIFICATIONS:

- Anodized aluminum
- Operating temperature: -13°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP20

CERTIFICATIONS: UL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
SCLP-4FT-40W-35K-D	40W	120~277V AC	4,400 LM	3500K
SCLP-4FT-40W-40K-D	40W	120~277V AC	4,400 LM	4000K
SCLP-4FT-40W-50K-D	40W	120~277V AC	4,400 LM	5000K

MODEL	DESCRIPTION
SCLP-4FT-TL	Optional Prismatic Lens Replaces The Parabolic lens Field Installed (Not Included)
SCLP-CB	Coupling Bracket (Not Included)

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- Lens: Louver Lens
- Total lumens: 4400 LM
- Color temperature: 3500K/4000K/5000K
- Color rendering index: >80

WARRANTY: 5 years

