




Bottom LED array ensures seamless coverage in proximity of the fixture

DIMENSIONS:

14-1/4"(W) x 9-1/4"(H) x 7-3/8"(D)

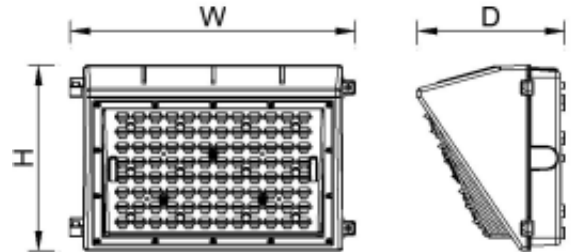

WML2-50W-50K-HL WML2-50W-40K-HL WML2-50W-30K-HL

LED NON-CUTOFF 2nd GENERATION WALL PACK

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120~277 VAC /60 Hz
- Wattage: 48 W
- Power factor: 0.95
- Efficacy: 135 LM/W

HOUSING SPECIFICATIONS:

- Die-cast aluminum housing
- Powder Coat finish (Dark Bronze)
- Same footprint as traditional HID wall packs
- Includes mounting hardware
- Four 1/2" hubs: 1 top, 1 on each side, 1 rear.
- Operating temperature: -40°F to 104°F
- Lifespan: 70,000 hr.
- IP Rating: IP65

CERTIFICATIONS: UL, DLC



| MODEL | WATTS | VOLTAGE | LUMENS | COLOR TEMP |
|-----------------|-------|-------------|---------|------------|
| WML2-50W-50K-HL | 48W | 120~277 VAC | 6500 LM | 5000K |
| WML2-50W-40K-HL | 48W | 120~277 VAC | 6500 LM | 4000K |
| WML2-50W-30K-HL | 48W | 120~277 VAC | 6500 LM | 3000K |

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- Lens: Polycarbonate Optic Lens
- LED Chip: Philips Lumileds LEDs
- Total lumens: 6500 LM
- Color temperature: 5000K/4000K/3000K
- Color rendering index: >80

WARRANTY: 7 years

