



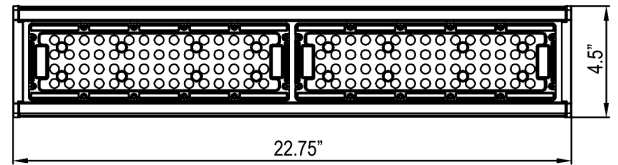

DIMENSIONS:

22.75" (L) x 4.5" (W) x 3" (H)



LOHB-2FT-50W-30K
LOHB-2FT-50W-50K

SIGN LIGHT

Ideal for Wall wash, sign, suspended outdoor/indoor lighting, small stadium and tracks

ELECTRICAL SPECIFICATIONS:

- Input Wattage: 50W
- Input Voltage: 120-277VAC
- Power factor: 0.9~0.97
- Efficacy: 130LM/W

HOUSING SPECIFICATIONS:

- Die-cast aluminum housing with back powder coat
- 1/2" NPT threaded knuckles included
- Removable Full shroud included
- Operating Temp: -40°F to 104°F
- Lifespan: 50,000hrs.
- IP rating: suitable for wet locations, IP65

CERTIFICATIONS: UL, DLC



LIGHTING SPECIFICATIONS:

- Total lumens: 6700LM/6500LM
- Color temperature: 3000K/5000K
- Color rendering index: >70
- Beam angle: 90°

WARRANTY: 7 years


MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LOHB-2FT-50W-30K	50W	120~277V AC	6500LM	3000K
LOHB-2FT-50W-50K	50W	120~277V AC	6700LM	5000K




LOHB-2FT-50W-30K LOHB-2FT-50W-50K

SIGN LIGHT


PHOTOMETRIC CHART:

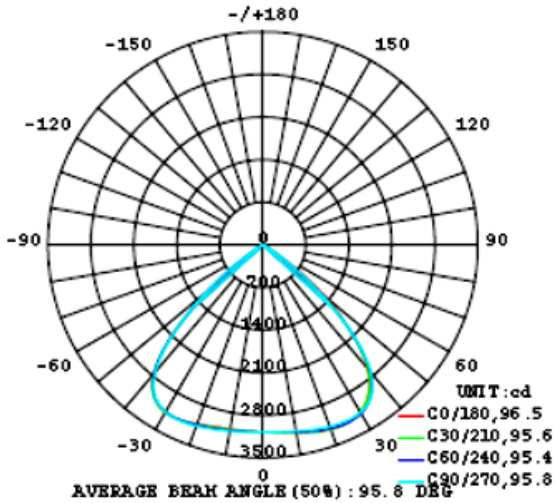

SPECTRAL POWER DISTRIBUTION:

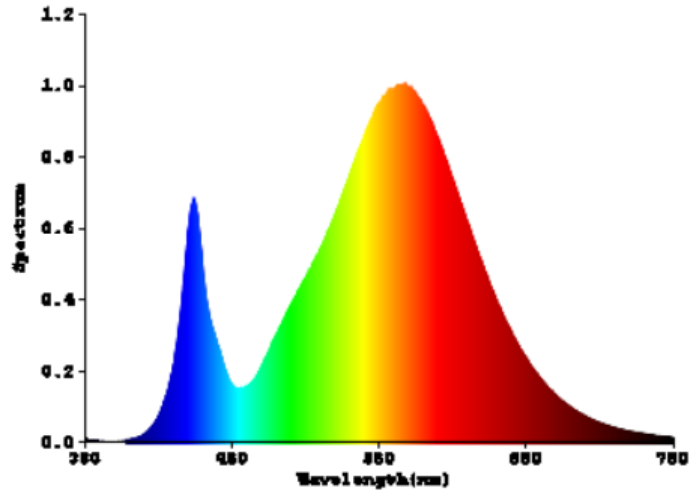

LUMINOUS INTENSITY DISTRIBUTION PLOTS:

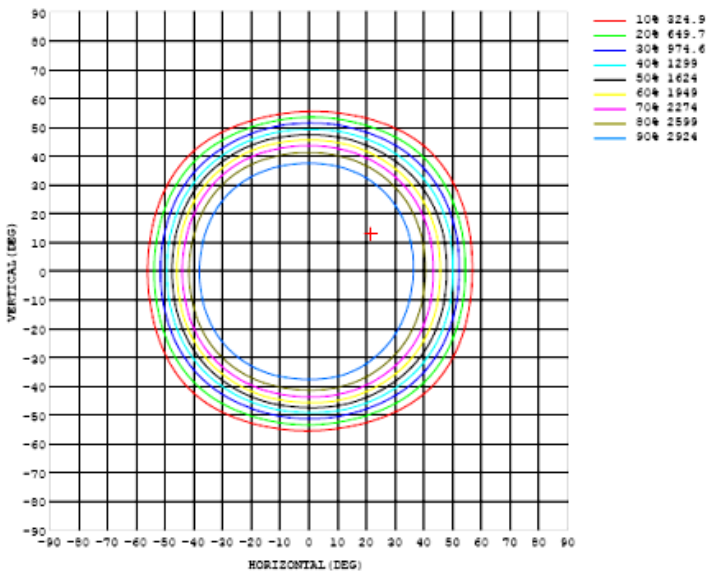

ZONAL LUMEN TABULATION:

$\alpha(^{\circ})$	LUMENS	%TOTAL
0-60	6534.95	98.23%
60-90	117.94	1.77%
0-90	6652.89	100%
90-180	0	0%
0-180	6652.9	100%

