

LSS-8FT-90W-MCTP



MULTI-CCTP
MCTP

Selection:




Customer Name: _____

Project Name: _____

Note: _____ | Type: _____

LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc.



88 3/4"(L) x 2 1/2"(W) x 2 3/5"(H)

Ideal choice for residential, commercial, and industrial lighting. Steady performance and long lifetime. Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below

Features

- High Lumen Efficiency
- Ceiling Mount or Suspended Mount
- Linkable (Optional Alignment Bracket Available)
- Multi CCT and Power (Switches are inside fixture)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 55W/ 65W/ 75W/ 90W
- Power Factor: >0.99
- Efficacy: 135 LPW

Mechanical:

- White Finish
- High Lumen Efficiency Lumen
- Lens: Polycarbonate Frosted Lens, Shatter Resistant
- Ceiling Mount or Suspended Mount
- Operating Temperature: -4°F to 122°F
- Housing: Cold-rolled Steel
- Lens: Polycarbonate Frosted Lens
- IP20, Indoor Use Only
- 5-Year Warranty

Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 11745LM Max.
- Color Temperatures: 3000K/ 3500K/ 4000K/ 5000K
- Multi CCT and Power (Switches are inside fixture)
- Color Rendering Index: CRI ≥ 80
- Reduces Energy Consumption Up to 80% Compared to a Fluorescent Fixture
- Rated life: 50,000 Hrs

Applications:


- LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc.
- Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below
- Ideal for residential, commercial, and industrial lighting. Steady performance and long lifetime

Other Models:


- 90W | 11745LM | LSS-8FT-90W-MCTP-BK



Photometrics: LSS-8FT-90W-MCTP

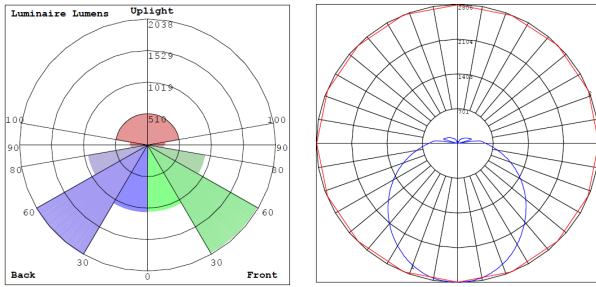


BUG Rating: B3-U4-G3

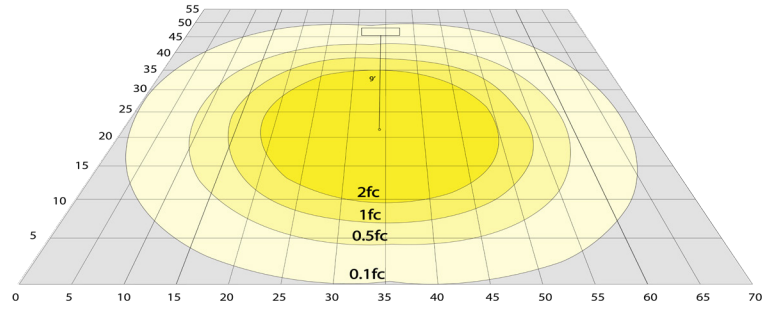


Area 55'x 70' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: LSS-8FT-90W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LSS-8FT-90W-MCTP	55W 65W 75W 90W	120~277V	7425LM 8775LM 10125LM 11745LM	3000K 3500K 4000K 5000K	B3-U4-G3	135

Sample Ordering

Model Size Wattage Color Temp.

LSS - 8FT - 90W - MCTP

Accessories:

Blank = No Option For Accessories
LSS-CB2 = ALIGNMENT BRACKET
SCL-TBC-WN = T-BAR CLIP WITH SUSPENSION HOLE ON TOP. WING NUT AND WASHER INCL.
SCL-CSY = ADJUSTABLE 1/16" 6FT. SUSPENSION KIT WITH Y-CONNECTOR KEY HOLE SET + 2 T-BAR CLIPS + 1 CABLE BUSHING + 3 PLASTIC TIE STRAPS - 70 LBS. MAX LOAD
SCL-GSY10 = HEAVY-DUTY ADJUSTABLE 1/16" 10FT. SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET)
SCL-GSY20 = HEAVY-DUTY ADJUSTABLE 1/16" 20FT. SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET)
SCL-GSY110 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.)
SCL-GSY120 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.)


Factory-Installed Options:

Blank = No Option For Accessories
OPT-EM-CM1INT = INTERNAL EMERGENCY BACKUP BATTERY
OPT-SEN-2MDR-36 = PROGRAMMABLE MICROWAVE BI-LEVEL
OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V
OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V
OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A, 125V, 3-CONDUCTOR 18AWG
WEC-3RC = OPTIONAL REMOTE

Example:

- LSS-8FT-90W-MCTP (FOR LSS 90W MCTP FIXTURE 120-277V)
- LSS-8FT-90W-MCTP LSS-CB2 (FOR LSS 90W MCTP FIXTURE 120-277V) (ALIGNMENT BRACKET)
- LSS-8FT-90W-MC LSS-CB2 OPT-EM-CM1INT (FOR LSS 90W MCTP FIXTURE 120-277V) (ALIGNMENT BRACKET) (INTERNAL EMERGENCY BACKUP BATTERY)

ACCESSORIES:

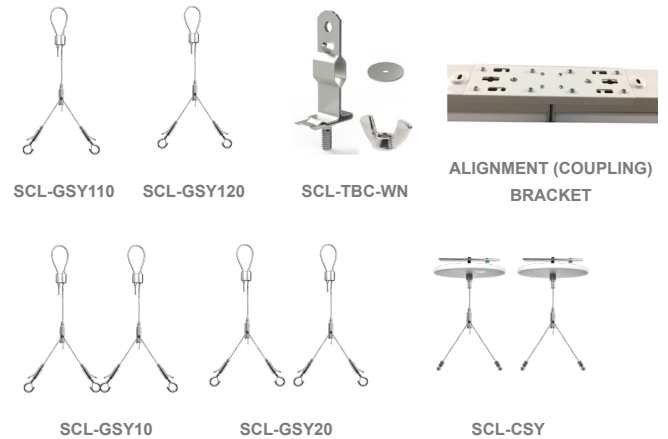

FACTORY-INSTALLED OPTIONS:

