

SCLP & SCLT

TECHNICAL SPECIFICATIONS:

- :: 4 Feet long
- :: Aluminum Finish
- :: Voltage: 120-277VAC 50/60Hz
- :: Wattage: 40W
- :: Ambient Temperature: -13°F~104°F
- :: Dimmable: 0~10V dimmable
- :: CRI:>80
- :: Power Factor:>0.95
- :: Efficacy: 115LM/W
- :: IP Rating: IP20
- :: Life Span: 50,000 hours
- :: Housing: Anodized Aluminum
- :: 5-year warranty

B15



SCLP-4FT-40W-D
Parabolic Reflector



SCLT-4FT-40W-D
Translucent Lens



Optional Accessories



Coupling Bracket
(Not Included)
See Below




6 Ft. Cord
SJTW 18 AWG 5-Conductor
(Not Included)
See Page B37



Adjustable 6 Ft.
Suspension Kit
Select a Y-Connector
Key Hole Set
(Not Included)
See Page B37

OPTIONS

- DAYLIGHT HARVESTING
- MOTION SENSOR
- BATTERY BACKUP

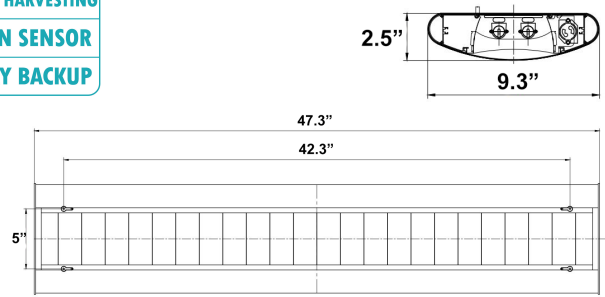

LED ARCHITECTURAL SUSPENDED LIGHTS

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	Lens	DIMENSIONS
SCLP-4FT-40W-50K-D	40W	4600LM	5000K	Parabolic Reflector	47.3"(L) x 9-2/8"(W) x 2-4/8"(H)
SCLP-4FT-40W-40K-D	40W	4600LM	4000K	Parabolic Reflector	
SCLP-4FT-40W-35K-D	40W	4600LM	3500K	Parabolic Reflector	
SCLT-4FT-40W-50K-D	40W	4600LM	5000K	Translucent Lens	
SCLT-4FT-40W-40K-D	40W	4600LM	4000K	Translucent Lens	
SCLT-4FT-40W-35K-D	40W	4600LM	3500K	Translucent Lens	
SCLP-CB	Coupling Bracket				