


UC-12V

12V

TECHNICAL SPECIFICATIONS:


Ideal for granite counter tops

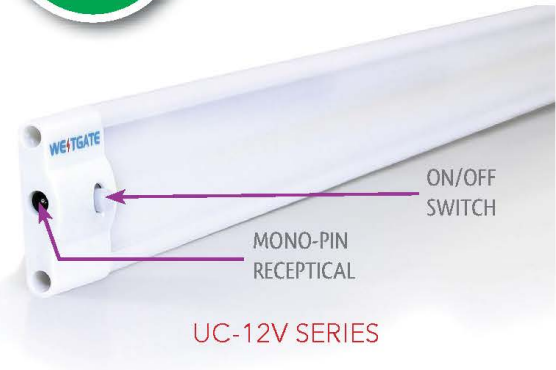

- :: Requires plug-in electronic or hard wired magnetic drivers
- :: Ultra-low profile—only 1/4" deep
- :: Extruded aluminum housing with white powder coat finish
- :: Polycarbonate end caps with universal feed thru mono-pin receptacle
- :: Smooth white acrylic lens (.125" thickness). No lamp imaging
- :: Highly efficient SMD 3528 chip technology
- :: Integral switch, push on—push off
- :: Mounting hardware and coupler included
- :: Working voltage: 12V DC—driver required
- :: Suitable for interior applications only
- :: Ambient temperature rating: -20°C (4°F) to +40°C (104°F)

FEATURES:

- :: Very low profile, easy to install, cool to the touch
- :: High brightness with excellent color rendition and years of maintenance free operation
- :: Wide selection of mounting hardware, accessories and LED drivers

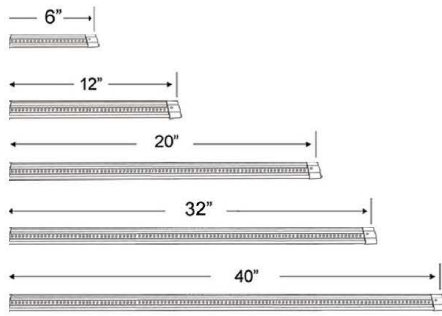

1-1/4" width x 1/4" height x Length



ACCESSORIES INCLUDED



12-VOLT LED UNDERCABINET

| CATALOG NO. | LENGTH | COLOR TEMP | WATTS | LUMENS | LED QTY |
|-------------|--------|------------|-------|--------|---------|
| UCW6WW | 6" | 3000K | 2W | 140LM | 24 |
| UCW6W | 6" | 6000K | 2W | 168LM | 24 |
| UCW12WW | 12" | 3000K | 3W | 250LM | 42 |
| UCW12W | 12" | 6000K | 3W | 280LM | 42 |
| UCW20WW | 20" | 3000K | 5W | 420LM | 72 |
| UCW20W | 20" | 6000K | 5W | 462LM | 72 |
| UCW32WW | 32" | 3000K | 8W | 590LM | 96 |
| UCW32W | 32" | 6000K | 8W | 640LM | 96 |
| UCW40WW | 40" | 3000K | 11W | 820LM | 144 |
| UCW40W | 40" | 6000K | 11W | 880LM | 144 |



D3

12V LED UNDERCABINET