




DIMENSIONS:

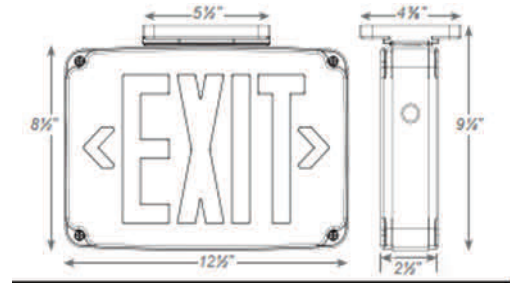

XT-WP-2RG-EM
XT-WP-2GG-EM

Wet Location Exit Sign

Durable NEMA 4X Wet Location listed LED exit with emergency back up



ELECTRICAL SPECIFICATIONS:

- Dual 120/277 voltage
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery)
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

LIGHTING SPECIFICATIONS:

- Ultra bright, energy efficient, long life red or green LED

CERTIFICATIONS:

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

HOUSING SPECIFICATIONS:

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish
- High-impact resistant, UV-stabilized polycarbonate clear lens
- Corrosion-resistant enclosure with engineering grade silicone gasket
- Top and side K/O's provided for conduit feed applications
- EZ snap-out chevron directional indicators
- UL listed for wet locations (-20°C – 50°C)

MOUNTING:

- Polycarbonate mounting canopy included for top or end mount

WARRANTY:

- Five-year warranty on all electronics and housing
- Battery pro rated for five years



JOB NAME: _____

DATE: _____

TYPE: _____

XT-WP-2RG-EM XT-WP-2GG-EM

Wet Location Exit Sign

ORDER INFORMATION:

MODEL	LETTERS	FACEPLATE	TRIMPLATE	VOLTAGE	BATTERY
XT-WP-RG-EM	Gray	Double	Red	120/277	4.8V Ni-Cad
XT-WP-GG-EM	Gray	Double	Green	120/277	4.8V Ni-Cad

OPTIONS:

- SDT: Self-diagnostic feature performs monthly, biannual and annual tests to ensure reliable operation and meet electrical and life safety codes
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit
- Custom: Signs available with requested "special" wording

ELECTRICAL INFORMATION:

MODEL NO	INPUT WATTS (W)	INPUT WATTS (W)	INPUT AMPS (A)	INPUT AMPS (A)
	120V	277V	120V	277V
XT-WP	5.4	5.4	0.045	0.019

